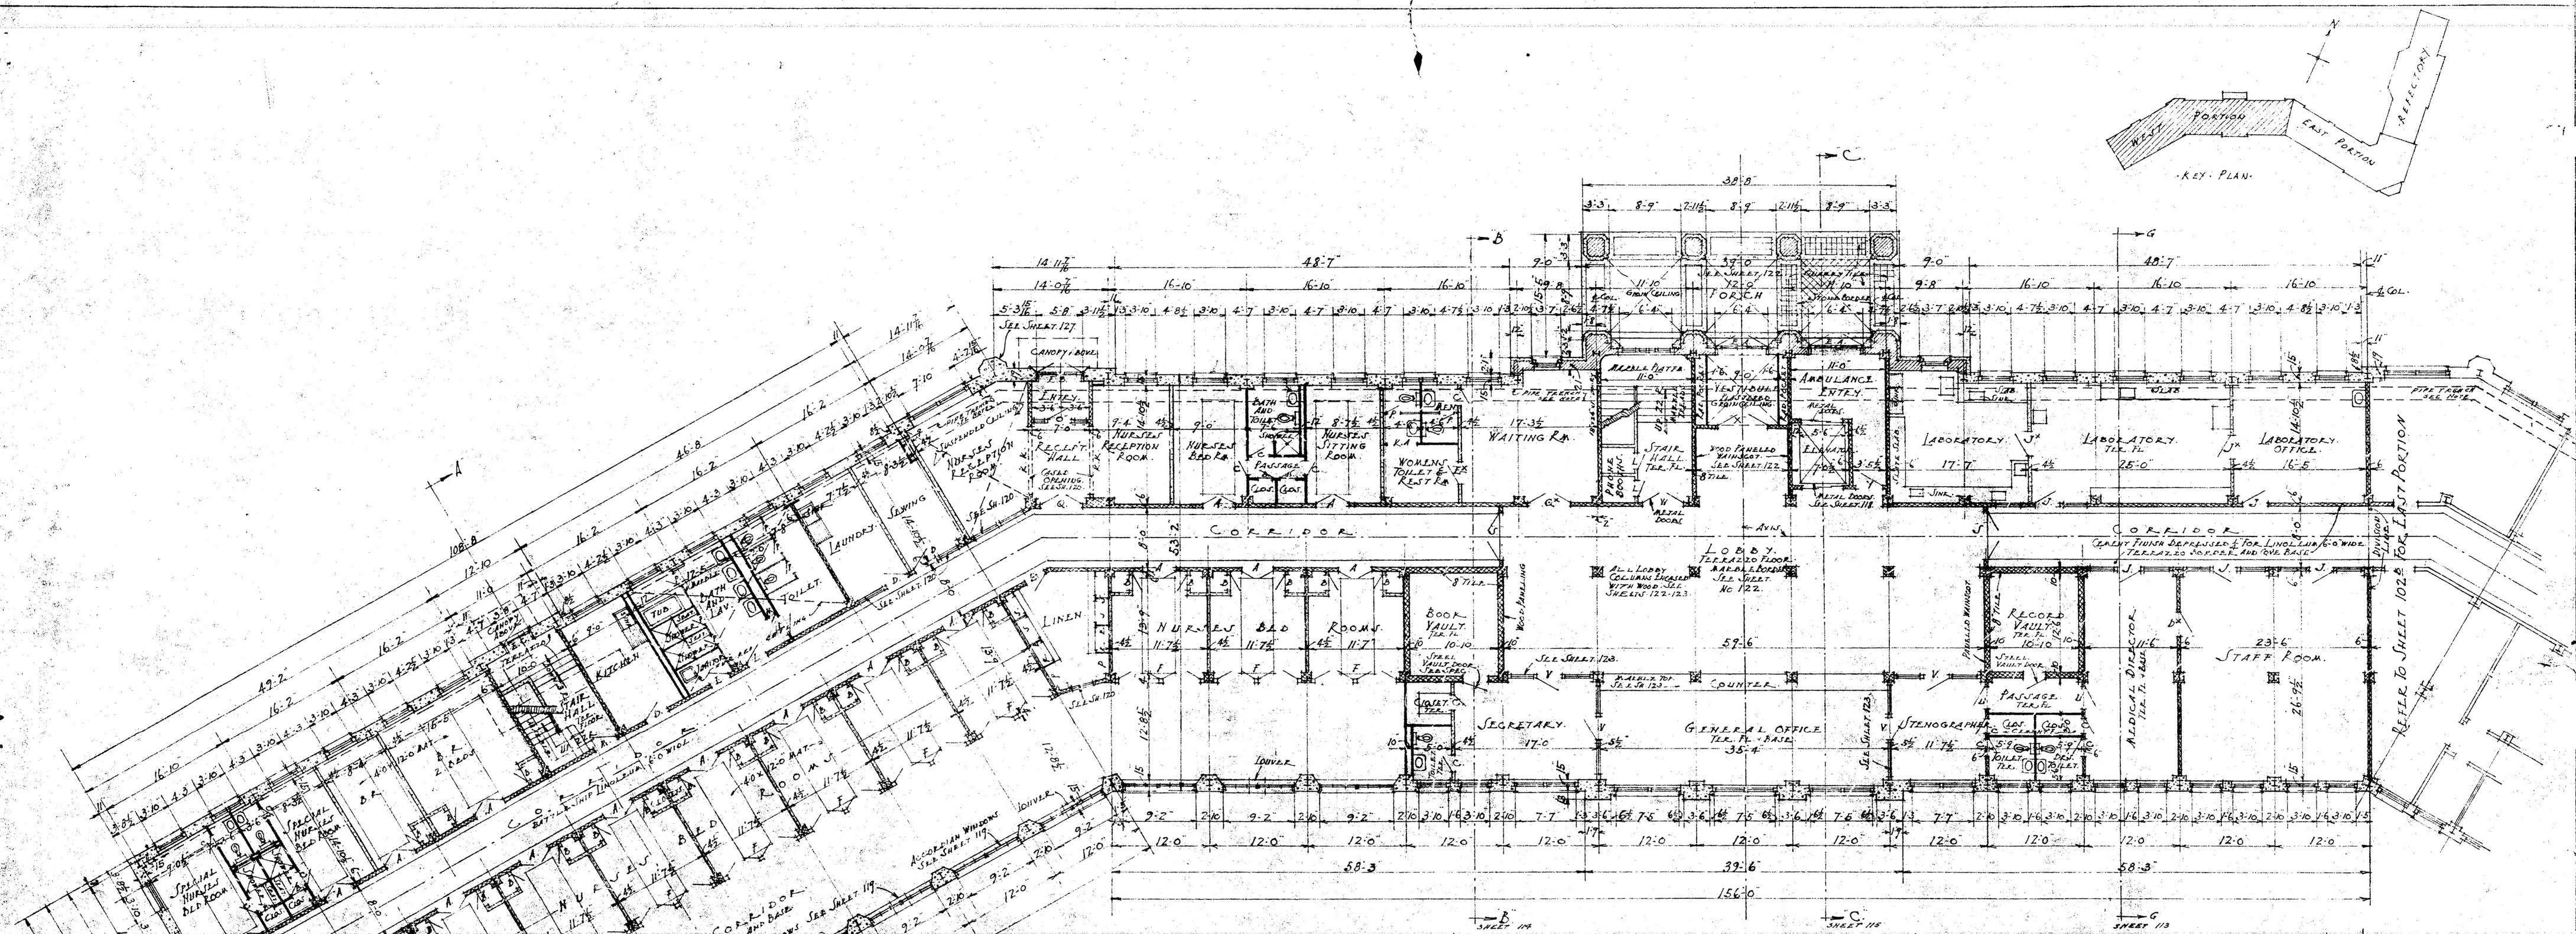

SCHEDULE OF EXTERIOR DOORS				SHEET NUMBER
E.A	TWO	3'-0 × 7'-0 × 1¾	SASH DOORS AND TRANSOM	124
E.B	TWO	2'-8 × 7'-0 × 1¾	SASH DOORS AND TRANSOM	127
E.C.		3'-4 × 7'-0 × 1¾	SASH DOOR. NO TRANSOM.	108
E.D	TWO	3'-0 × 7'-0 × 1¾	SASH DOORS AND TRANSOM.	111
E.E	TWO	3'-0 × 7'-0 × 1¾	SASH DOORS AND TRANSOM.	112
E.F	TWO	3'-6 × 7'-0 × 1¾	SASH DOORS AND TRANSOM.	119
E.G		2'-8 × 7'-0 × 1¾	SASH DOOR AND TRANSOM	114

SCHEDULE OF INTERIOR DOORS				SHEET NUMBER
A.	TWO.	2'-0 × 7'-0 × 1⅜	SOLID DOORS & TRANSOM.	119
A*	SAME AS A EXCEPT TRANSOM SASH AS NOTED ON SHEET			119
B.		1'-9 × 6'-3 × 1¾	SOLID DOOR. NO TRANSOM	119
C.		2'-0 × 7'-0 × 1¾	" " "	120
C.S		2'-6 × 6'-6	COLD STORAGE DOORS. NOT IN GENL. CONTRACT.	
D.		3'-0 × 7'-0 × 1¾	SOLID DOOR AND TRANSOM	120
D*	SAME AS D. EXCEPT	NO TRANSOM.		120
D.*	TWO	2'-8 × 7'-0 × 1¾	SASH DOORS. NO TRANSOM	117
E		2'-8 × 7'-0 × 1¾	SOLID DOORS AND TRANSOM (E* SASH DOOR)	120
E*	SAME AS E EXCEPT	NO TRANSOM.		120
F.	FOUR	2'-4 × 7'-0 × 1¾	SASH DOORS AND TRANSOM.	119
F*	SAME AS F EXCEPT	TRANSOM SASH AS NOTED ON SHEET		119
G	TWO	2'-0 × 7'-0 × 1¾	SASH DOORS AND TRANSOM.	120
H		3'-4 × 7'-0 × 1¾	SASH DOOR AND TRANSOM	120
I.		3'-0 × 7'-0 × 1¾	SASH DOOR. NO TRANSOM. (DOUBLE ACTING)	120
J.		3'-0 × 7'-0 × 1¾	SASH DOOR AND TRANSOM	120
J*	SAME AS J EXCEPT	TRANSOM SIZE. SEE SHEET.		119
J**	"	J. " NO TRANSOM.		119
K.		3'-0 × 7'-0	CASED OPENING.	120
K.K		8'-0 × 9'-2"	"	120
K*		4'-0 × 7'-0"	"	120
L.		2'-0 × 7'-0 × 1¾	SASH DOOR. NO TRANSOM.	120
M.		3'-0 × 7'-0 × 1¾	METAL SASH DOORS AND TRANSOM.	120
M*	SAME AS M. EXCEPT	NO TRANSOM.		120
M.D.		3'-0 × 7'-0 × 1¾	METAL SASH DOOR. SIDELIGHTS & TRANSOM	118
M.A		3'-8 × 7'-0 × 1¾	" SOLID - NO TRANSOM	120
M.*		3'-0 × 7'-0 × 1¾	" - NO TRANSOM	120
M.*		3'-8 × 7'-0 × 1¾	" - SASH - AND TRANSOM	120
N.		1'-6 × 7'-0 × 1¼	SOLID WOOD DOOR. TO PIPE SPACE	120
O.		3'-0 × 7'-0 × 1¾	SASH DOOR. SIDELIGHTS AND TRANSOM	120
P.		1'-10 × 6'-0 × 1¾	KETTLE CUBICLE & SHOWER STALL DOORS.	120
Q.	TWO	2'-8 × 7'-0 × 1¾	SASH DOORS AND TRANSOM. SUBLTS.	119-120
Q*	TWO.	2'-8 × 7'-0 × 1¾	SASH DOORS. NO TRANSOM	123
Q.*	TWO	2'-8 × 7'-0 × 1¾	SOLID DOORS. NO TRANSOM	117
R	TWO	2'-0 × 7'-0 × 1¾	SASH DOOR & TRANSOM. SAME AS G EXCEPT THAT	120

INTERIOR DOORS (CONTINUED)				SHEET NUMBER
S.	TWO.	3'-0 × 7'-0 × 1¾	SASH DOORS. NO TRANSOM	123
S*	TWO	3'-0 × 7'-0 × 1¾	SASH DOORS AND TRANSOM	117
S**	TWO.	3'-0 × 7'-0 × 1¾	SOLID DOORS. NO TRANSOM.	117
T.		2'-8 × 7'-0 × 1¾	METAL SOLID DOOR.	120
U		2'-8 × 7'-0 × 1¾	SASH DOOR. NO TRANSOM.	123
V		3'-0 × 7'-0 × 1¾	" " "	123
W.	TWO	2'-8 × 7'-0 × 1¾	METAL SASH DOORS	123
X	TWO.	3'-0 × 7'-0 × 1¾	SASH DOORS AND TRANSOM	123
Y		2'-8 × 7'-0 × 1¾	SASH DOOR. NO TRANSOM	123
Z		3'-8 × 7'-0 × 1¾	SOLID DOOR AND TRANSOM	120
Z*	SAME AS Z EXCEPT	NO TRANSOM.		120
Z**		3'-8 × 7'-0 × 1¾	SASH DOOR AND TRANSOM.	120
E*	SAME AS E EXCEPT	SASH DOOR. OBSCURE GLASS		114
P*		2'-6 × 6'-0 × 1¾	SOLID DOOR. (BATH ROOMS)	

REFER TO PLANS FOR TYPE OF PARTITIONS AND JAMB THICKNESS FOR ALL DOORS. ALSO REFER TO SHEETS. 118-119-120.

WEST PORTION
GROUND FLOOR PLAN
SCALE 1/8" = 1'-0"

KEY TO MATERIALS

EARTH · CONCRETE · BRICK IN SECTION · BRICK IN ELEVATION · STONE · CLAY TILE · GYPSUM · SOLID PLASTER PART. · STEEL · WOOD · PLASTER · TERRAZZO · MARBLE · SHEET-METAL IN ELEVATION

PIPE TRENCH TO HAVE 2½" THICK REINFORCED TER. PLATE COVERS WITH BRASS STRIPS ALONG EDGES

HOSPITAL
WAVERLY HILL SANITARIUM
VALLEY STATION · JEFFERSON COUNTY · KY.

DRAWN BY LUEDING · D·X MURPHY & BRO. ARCHITECTS · LOUISVILLE · KENTUCKY · SHEET NO. 102